




LONG[®]

Thermal Products

Active and Passive Warm-Up Products

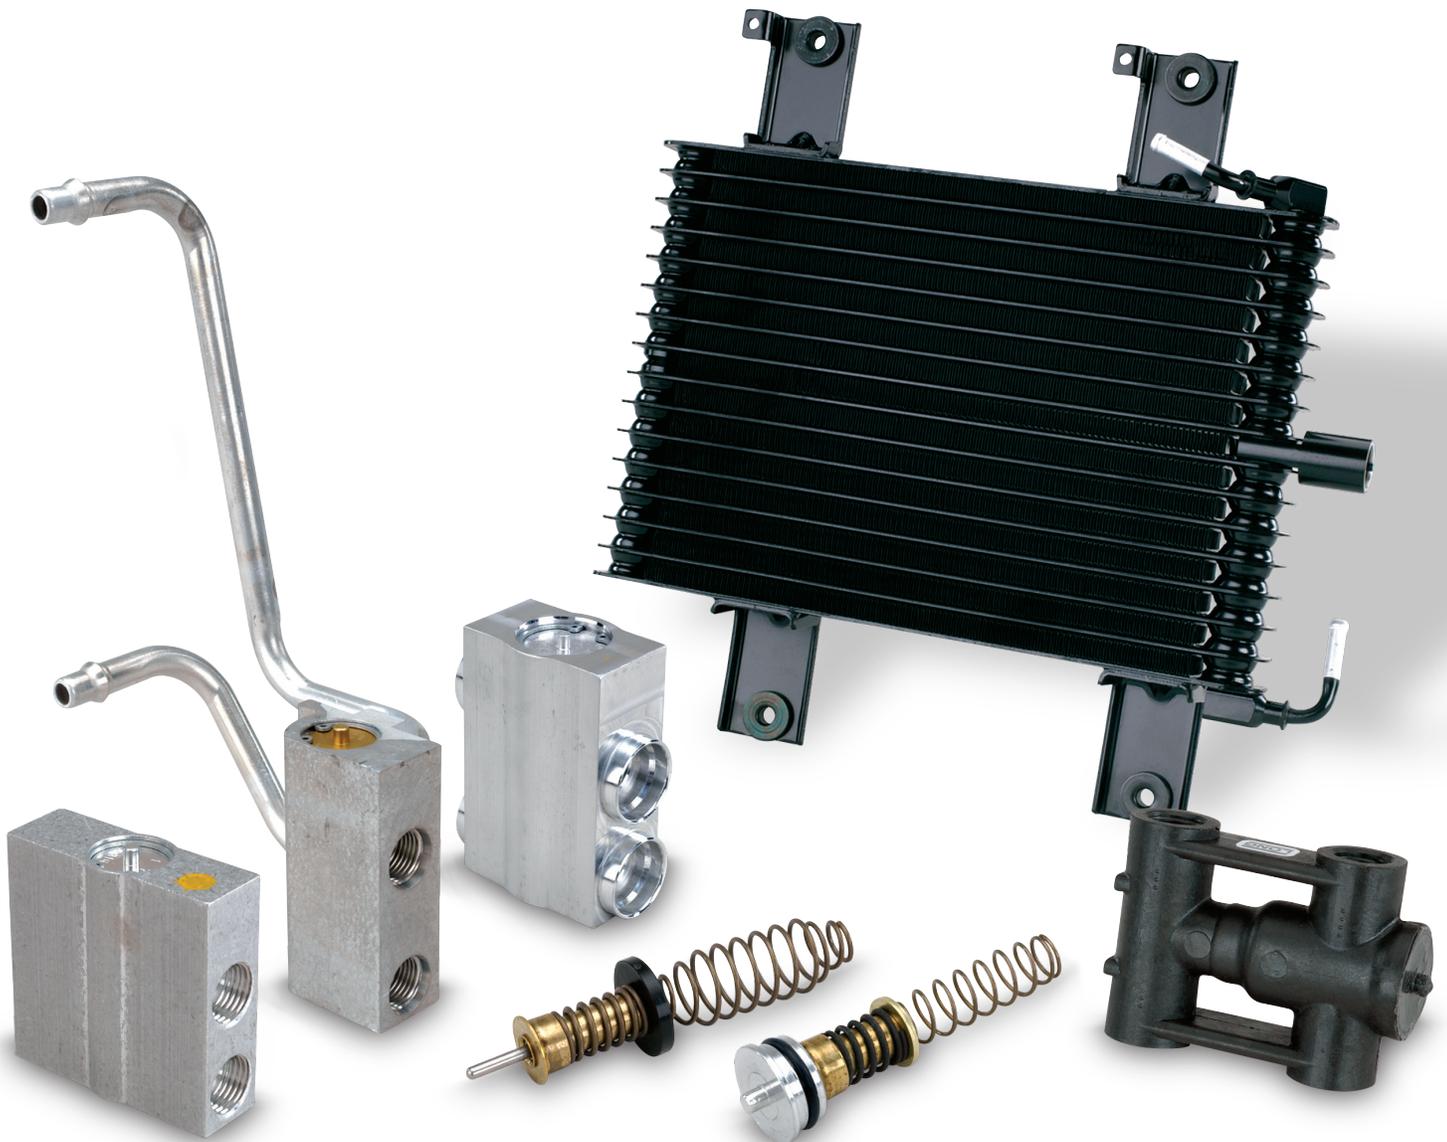

Active and Passive Warm-Up Products

Dana helps deliver improved fuel economy (up to 4% savings) and reduced emissions with Long® active and passive warm-up units (AWUs).

Thermal management is a critical area of design. A certain percentage of fuel has to be consumed in order to overcome friction in powertrain components such as the transmission, engine, and axle. To enhance vehicle efficiency, a reduction of this friction is necessary. Dana engineers found that maintaining hot oils in the powertrain increased both efficiency and overall fuel economy.

Two techniques that help maintain optimum hot oil temperatures, especially in cold climates where it takes longer for engines to meet optimum operating temperatures, are:

- Capturing the thermal energy generated inside each component
- Bringing in external, otherwise wasted, thermal energy from the vehicle cooling and exhaust systems to warm engine oils

Thermal Bypass Valve (TBV)


This device prevents cold or partially warmed oils from leaving powertrain components such as the transmission. Internal circulation of vehicle oils keeps thermal energy from dissipating and consequently improves efficiency.

Active Warm-Up (AWU)

In most vehicle applications in the northern hemisphere, heat generated internally is not sufficient to bring oils to optimum temperature quickly enough to reduce friction or parasitic losses. AWU uses otherwise wasted thermal energies, such as heat lost through cooling systems or engine exhaust, to warm these oils – even above what can be achieved through TBVs alone.

The combination of these two technologies creates an integrated system that reduces complexity and increases the system's response time, bringing vehicle oils to optimum operating temperature quickly and maintaining it, resulting in a significant reduction of fuel consumption and emissions.

Stand Alone							
Length (mm)	61	25	41	52	52	60	48
Width (mm)	20	23	23	23	23	33	45
Height (mm)	61	69	71	70	74	77	71

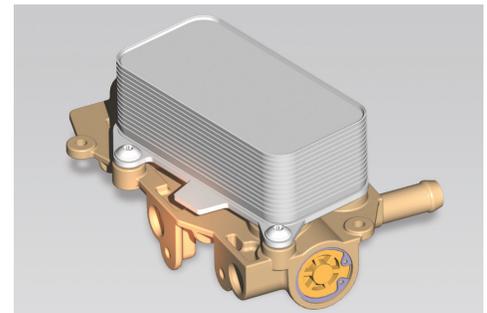


Thermal Bypass Valve Cartridges

Designed to customer specifications



Integrated with Heat Exchanger

Designed to customer specifications



Dana.com/light-vehicles

Application Policy

Capacity ratings, features, and specifications vary depending upon the model and type of service. Application approvals must be obtained from Dana; contact your representative for application approval. We reserve the right to change or modify our product specifications, configurations, or dimensions at any time without notice.



LONG®

Thermal Products